Data Sheet | Item Number: 221-2501

Mounting carrier with strain relief; 1-way; for inline splicing connector with lever; for

screw mounting; gray

https://www.wago.com/221-2501








Color: ■ gray





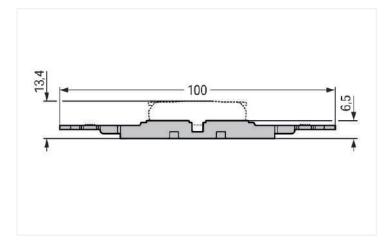

Data Sheet | Item Number: 221-2501

https://www.wago.com/221-2501



Physical data

Width 11.8 mm / 0.465 inches Height from the surface 6.5 mm / 0.256 inches 100 mm / 3.937 inches Depth

Mechanical data

Design 1-way Mounting type Screw mount

Material data

Note (material data)

Information on material specifications can be found here

Color gray Material group

Insulation material (main housing) Polyamide (PA66)

V0 Flammability class per UL94 Fire load 0.067 MJ

Weight 2.2 g

Commercial data

ETIM 9.0 EC002848 **ETIM 8.0** EC002848 PU (SPU) 25 (5) pcs Packaging type Box Country of origin CN 4066966119824

Customs tariff number 39269097900

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product

Compliance 221-2501



CAD/CAE-Data

CAD data

2D/3D Models 221-2501

CAE data

EPLAN Data Portal 221-2501





Data Sheet | Item Number: 221-2501

https://www.wago.com/221-2501



1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 209-119

Fixing screw; for 209-120 mounting carrier



Item No.: 209-123

Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray



Item No.: 209-120

Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 210-834

Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

Installation Notes

Installation



Place the inline splicing connector on the carrier in front of the mounting position.



Push the connector to the center position until it snaps into place.



Mounting carrier without strain relief – snapped onto DIN-rail



Various combinations of 1- to 5-connector mounting carriers are possible via side-by-side latching mechanism.

Strain relief



3-pole mounting carrier with strain relief



Page 4/4 Version 23.03.2025